


LC-180AR: Portable High Brightness Projector for Classrooms, Training Rooms, and Churches.

KEY FEATURES:

- Powerful, 200 ANSI Lumens image brightness from a 200 Watt long-life Metal Halide lamp.
- New improved dichroics transmit more light for a brighter image.
- Projects up to a 200" diagonal picture.
- High resolution polysilicon LCD panels with 544,410 pixels.
- Portable, easy-to-carry. New BNC input, external speaker output.

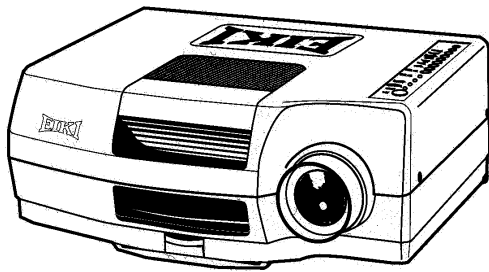

OTHER IMPORTANT FEATURES:

- Adjustable, short-throw zoom/focus lens.
- IR Wireless Remote Control. Digital on-screen menu display.
- Built-in 3-watt speaker and amplifier. Low profile design for tabletop, desktop or ceiling mounting.
- Full audio and video inputs. Connects to VCR's, video disk players, video cameras and TV tuners.
- Optional Accessories: Soft Travel Case with wheels and telescoping handle. Soft Carry Bag. Hard Shipping Case Ceiling Mount.

LC-180AR SPECIFICATIONS:

Screen Brightness200 ANSI Lumens
Illumination Uniformity30%
Size of Color Palette16.7 Million
Contrast Ratio100 :1
Horizontal Resolution550 TV Lines
Projection Lamp200-Watt, Long-Life Metal-Halide
Light - RGB DistributionDichroic Mirror System
Imaging System1.3" PolySilicon TFT Panels x 3
Screen Pixels789x230 = 181,470
Total Pixels181,470 x 3 = 544,410
Lens TypeManual Zoom and Focus
Image Min. - Max. (Diag.)30" - 200" diagonal
Image Min. - Max. (Wide)2.0' - 13.3' (.61m - 4.06m)
Throw - Min. - Max.5.2' - 34.8'(1.59m - 10.62m)
Width-to-Throw FactorApprox. 2.0 - 2.6
Elevation: FrontVariable (Front Legs)
Keystone EliminationOffset, Ratio (Bottom:Top) 1:4
ScanningAuto: H Sync. 15-734kHz
Image OrientationNormal, Reversed-Inverted
Remote ControlInfrared
Video StandardsNTSC
Video Channels1

SPECIFICATIONS (cont.)

Video InputRCAx 1, BNC x 1, S-Video x 1
Video OutputRCAx 1
Video Audio InputRCA x 2 (L/R)
Audio - Amplifier3 Watt Mono (10% THD)
Audio - Built-in Speaker5 x 9 cm x 1
Audio - Audio MonitorRCA x 2 (L/R)
Audio - External Speaker Amplifier3 Watt Stereo (10% THD)
Audio - External Speaker Jack1x Mini (Stereo)
Fan Noise LevelLess than 51.0 dB
Size (HxWxD)6.2" x 16.8" x 15" (158 x 430 x 385 mm)
Weight19.6 Lb. (8.9kg)
Power Requirements120VAC, 50/60 Hz
Power Consumption260 Watts
Power Cord10' (3M) Type 3, Detachable
Safety CompliancesUL Listed
Warranty - Projector1 Year Parts & Labor
Warranty - Projection Lamp90 Days Or 2,000 Hours, Whichever Occurs First.

Specifications subject to change without notice.

©1997 EIKI International, Inc. Printed in the USA. 1/28/98

EIKI

Key to better communications.